




Extreme-C SoundGrid Server X15

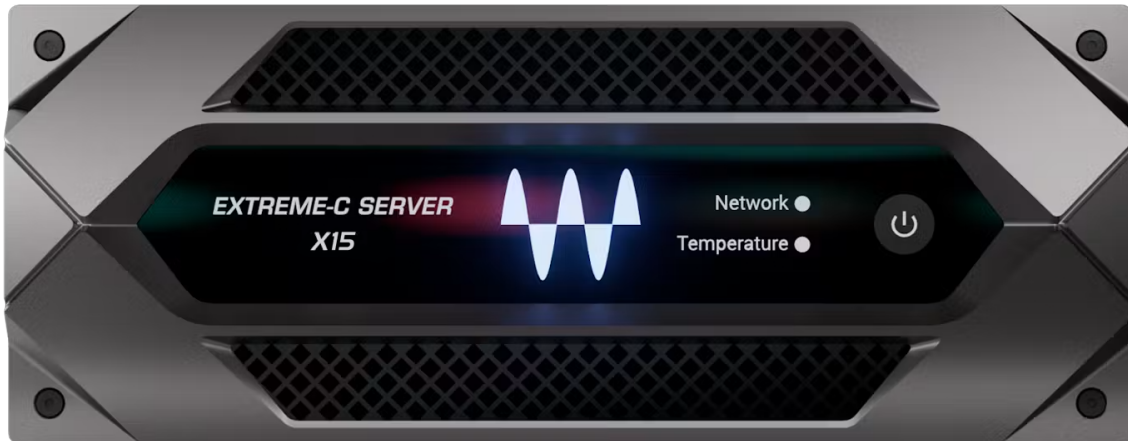

Architects and Engineers Specification

The Extreme-C SoundGrid Server X15 shall be designed exclusively for use with SoundGrid systems. The Extreme-C Server X15 shall support Ethernet connection for audio I/O and control on an Ethercon connector. The Extreme-C Server X15 shall have internal CPU for audio processing. The Extreme-C Server X15 shall have up to 256x256 input and Output channels for audio processing of SoundGrid AoIP audio packets. The server configuration, life cycle management and all programming of the audio processing shall be software configurable over the SoundGrid network protocol via the network by one of the SoundGrid host applications for OS X and Windows including but not limited to eMotion LV1, SuperRack.

The Extreme-C Server X15 shall have one standard USB type C connector for emergency boot. The Extreme-C Server X15 shall have a power on/off button on the front panel. The Extreme-C Server X15 front panel also supports two status LEDs to indicate networking and CPU temperature status. The Extreme-C Server X15 shall support a removable front panel that can be removed for dust filter cleaning or replacement.



The Extreme-C Server X15 shall be rack mountable - 2RU in height, ½ rack width - and shall be rack mountable using extension ears. The Extreme-C Server X15 shall be also rack mountable together with another Extreme-C Server X15 or Axis Scope X15 using a tray. The Extreme-C Server X15 shall be CE marked, UL listed, and shall be compliant with the RoHS directive. Warranty shall be one year.

Specification Table

Overall Dimensions	Length: 22 cm / 8.7 inches Height: 8.6 cm / 3.4 inches Depth: 28.6 cm / 11.3 inches
Weight	Device Weight: 3.7 kg / 8.1 lbs Package Weight: 5.3kg / 11.7 lbs
Power Consumption (100~240VAC 50/60Hz) IEC Connector	90W at 100-120V 90W at 220V
Sampling Rates	44.1, 48, 88.2, 96 kHz
CPU and RAM	CPU: Intel® Core Ultra RAM: 8 GB
Connectivity	USB-C : USB 3.2 1.0A and DP port (Service only) Ethercon connector : 1 Gbit Ethernet
Environment	Operating Environment temperature range: 50° to 95°F / 10° to 35°C Max Environment temperature: 104°F / 40°C
Compliance	UL, CE, FCC, CB



Physical Drawings

 All Dimensions are in Millimeters
and Inches
August 2026

